


## Přírubové uchycení

Litínové provedení

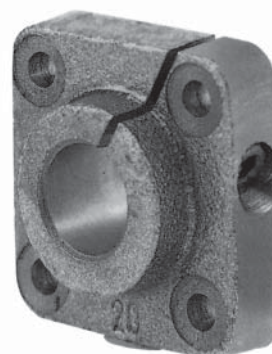

Označení	Rozměry [mm]								Hmotnost [kg]
	$\varnothing d$	$\varnothing D1$	A	L	E	V	M	$\varnothing d1$	
<b>FWBG-12</b>	12	23,5	42	20	$30^{\pm 0,12}$	12	M4	5,5	0,15
<b>FWBG-16</b>	16	27,5	50	20	$35^{\pm 0,12}$	12	M4	5,5	0,21
<b>FWBG-20</b>	20	33,5	54	23	$38^{\pm 0,15}$	14	M5	6,6	0,28
<b>FWBG-25</b>	25	42	60	25	$42^{\pm 0,15}$	16	M6	6,6	0,41
<b>FWBG-30</b>	30	49,5	76	30	$54^{\pm 0,25}$	19	M8	9	0,75
<b>FWBG-40</b>	40	65	96	40	$68^{\pm 0,25}$	26	M10	11	1,65
<b>FWBG-50</b>	50	75	106	50	$75^{\pm 0,25}$	36	M10	11	2,60

Odpovídající typy vodících tyčí - viz str. 66-69.  
Rozměry d, L, A, V - tolerance dle DIN 1686 - GTB 15.