


Pohyblivé uchycení

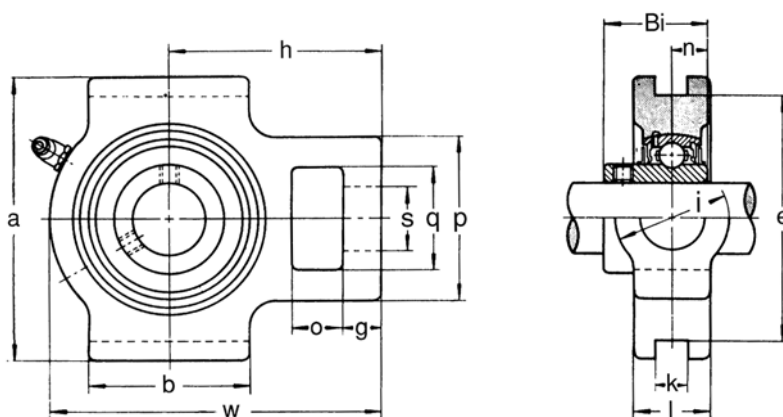

Typ	Ø hřídele [mm]	Rozměry [mm]															Ložisko	Krytka	Hmot. [kg]	Zatížení [kN]	
		o	g	p	q	s	b	k	e	a	w	i	l	h	Bi	n				Dynamic	Static
UCT 201	12	16	10	51	32	19	51	12	76	89	94	32	21	61	31	12,7	UC 202	T204	0,77	12,2	6,35
UCT 202	15	16	10	51	32	19	51	12	76	89	94	32	21	61	31	12,7	UC 201	T204	0,79	12,2	6,35
UCT 203	17	16	10	51	32	19	51	12	76	89	94	32	21	61	31	12,7	UC 203	T204	0,76	12,2	6,35
UCT 204	20	16	10	51	32	19	51	12	76	89	94	32	21	61	31	12,7	UC 204	T204	0,74	12,2	6,35
UCT 205	25	16	10	51	32	19	51	12	76	89	97	32	24	62	34	14,3	UC 205	T205	0,82	13,3	7,5
UCT 206	30	16	10	56	37	22	57	12	89	102	113	37	28	70	38,1	15,9	UC 206	T206	1,26	18,6	10,8
UCT 207	35	16	13	64	37	22	64	12	89	102	129	37	30	78	42,9	17,5	UC 207	T207	1,65	24,5	14,6
UCT 208	40	19	16	83	49	29	83	16	102	114	144	49	33	88	49,2	19	UC 208	T208	2,38	27,7	17
UCT 209	45	19	16	83	49	29	83	16	102	117	144	49	35	87	49,2	19	UC 209	T209	2,42	31	19,5
UCT 210	50	19	16	83	49	29	86	16	102	117	149	49	37	90	51,6	19	UC 210	T210	2,52	33,5	22,5
UCT 211	55	25	19	102	64	35	95	22	130	146	171	64	38	106	55,6	22,2	UC 211	T211	3,97	41,5	28
UCT 212	60	32	19	102	64	35	102	22	130	146	194	64	42	119	65,1	25,4	UC 212	T212	5,06	50	34,5
UCT 213	65	32	21	111	70	41	121	26	151	167	224	70	44	137	65,1	25,4	UC 213	T213	6,99	54,7	38
UCT 214	70	32	21	111	70	41	121	26	151	167	224	70	46	137	74,6	30,2	UC 214	T214	7,09	59	42
UCT 215	75	32	21	111	70	41	121	26	151	167	232	70	48	140	77,8	33,3	UC 215	T215	7,53	63	47
UCT 216	80	32	21	111	70	41	121	26	165	184	235	70	51	140	82,6	33,3	UC 216	T216	8,51	69	51
UCT 217	85	38	29	124	73	48	157	30	173	198	260	73	54	162	85,7	34,1	UC 217	T217	11,17	80	61